USER MANUAL

HC3511E

HDMI Fiber Optic Transmission

1. Introduction
2. Panel Description
3. Function Specification
4. Connection and operation

1.0 Introduction

HC3511E is a perfect solution for transmitting HDMI audio and video through the fiber, the set of device includes a sender and a receiver. Our products transmit the HD video over optical fiber, which making the images clearer as well as the transmission more stable. At the same time, the product has the built-in IR remote control function.

2.0 Panel Description

2.1 Front Panel

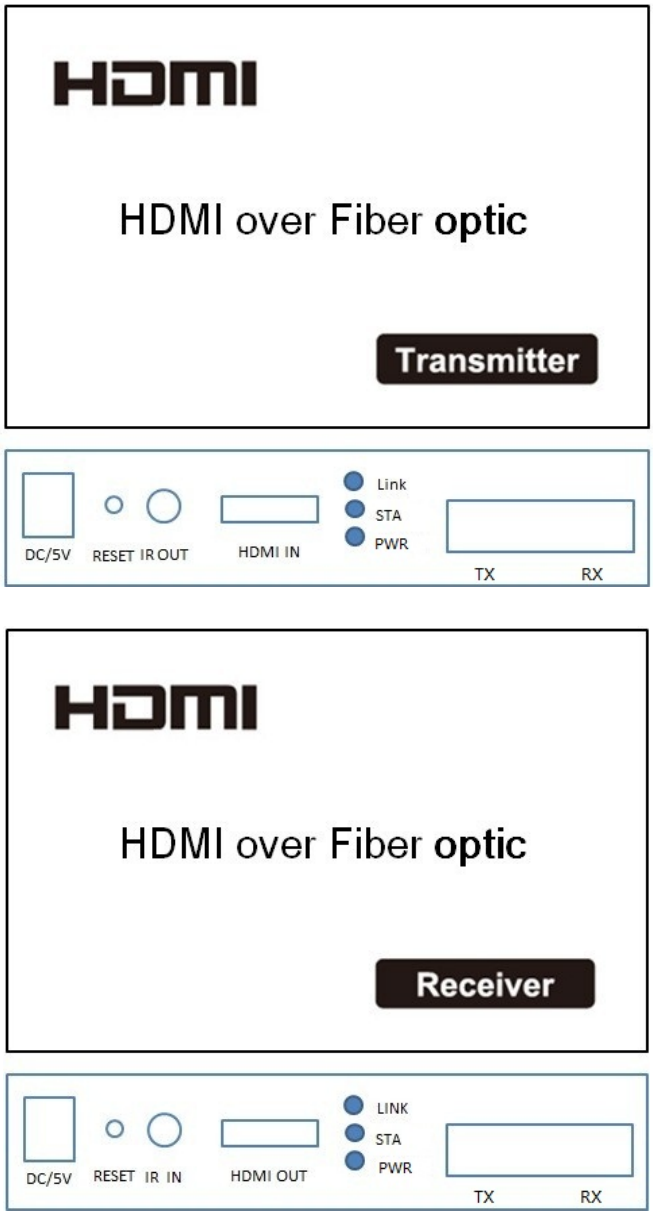

	HDMI TX	HDMI RX
HDMI PORT	Video Resource Input	Video Resource Output
IR PORT	Infrared Output	Infrared Input
Fiber Port SC	Fiber Connector	
RESET KEY	Recover default setting after 8 seconds	

2.2 Indicator led.

Indicator led	Status	
Link	Light On	The fiber link is correct
	Light Off	The fiber link is not correct
STA	Light On	System starts
	Flash	Packets of data are transmitting in the indicating port
PWR	Light On	Power Supply is right
	Light Off	No Power Supply

3.0 Function Specification

> HDMI 1.3/HDCP1.1 & 1.2

> Both Optic-fiber transmission and Ethernet Transmission

> Support point-to-point mode, one point-to-many mode and cascaded transmission mode.

> built-in IR remote control function, you can control the set-top box at the receiving site using the IR remote control.

> Pure hardware design, just plug and play, no need to install extra software.

Video Parameter	
Video Resolution	640X480 @ 60fps 800X600 @ 60fps
	1024X600 @ 60fps 1024X768 @ 60fps
	1152X864 @ 60fps 1280X600 @ 60fps
	1280X720@ 60fps 1280X768@ 60fps
	1280X800@ 60fps 1280X960@ 60fps
	1280X1024@ 60fps 1440X1050@ 60fps
	1440x900 @ 60fps 1600x900 @ 60fps
	1660x1200 @ 60fps 1680x1050 @ 60fps
	1920x1080 @ 60fps 1920 x1200 @ 60fps
Audio	32kHz, 44.1kHz and 48kHz
Infrared Support	38KHz; NEC code
HDMI Version	HDMI 1.3
HDCP Version	HDCP 1.2
Other Parameters	
Power input	AC input: 100V - 240V (50 - 60Hz)
Max Power Consumption	Transmitter: 5W
	Receiver: 5W
Size (L-W-H)	110×80×27 mm

Net Weight	360g*2pcs
Operating Temperature/Humidity	-45℃ - 70℃ / 10% - 80%RH(no condensation)
Storage Temperature/Humidity	-60℃ - 80℃/ 5% -90% RH(no condensation)

Fiber Parameter

Product Model	Max Distance	Fiber type	Optical Interface	Wave Length	Optical Power	Receiving Sensitivity	Link Budget
HC3511E-D550	550M	multi mode	SC	850nm	-9~-3dBm	-26dBm	-17dBm
HC3511E -S20	0-20KM	single mode	SC	1310nm	-11~-3dBm	-36dBm	-25dBm
				1510nm	-11~-3dBm	-36dBm	-25dBm
HC3511E -S40	0-40KM	single mode	SC	1310nm	-5~0dBm	-36dBm	-31dBm
				1510nm	-5~0dBm	-36dBm	-31dBm

4.0 Connection and operation

1. Please connect the HDMI signal source to the HC3511E-T
2. Connect HC3511E-R to the HD displayer.
3. Between HC3511E-T and HC3511E-R (SC port-to-SC port) use optical fiber to connect.
4. IR remote control function, connect the IR receiver to the HDMI TX and connect the IR transmitter to the HDMI RX.
5. Power on the device, POWER light on, then it will do the self-checking job with the other indictors blinking automatically. When the Link light flash, the device starts up.

Application diagram